



Kömmerling®

TODAY FOR TOMORROW



NO THRESHOLD – ONE SYSTEM

Kömmerling PremiPlan Plus



THE PREMIUM THRESHOLD SYSTEM FOR OPTIMUM BARRIER FREENESS

Barrier-free transitions, i.e. without threshold, from the living space to the terrace or balcony are now standard in high-quality house building. However, it must be ensured that no rainwater can enter the building from the outside. Kömmerling PremiPlan Plus can be installed in the area of flat roofs or in the area close to and in contact with the ground.

Kömmerling PremiPlan Plus can be used for single leaf residential doors as well as for single- and double-leaf glazed doors including floating mullion elements for the window and door systems Kömmerling 76 double seal and centre seal, Kömmerling 88 double seal and centre seal (inward opening) and Kömmerling 76 Unity.

ZERO MILLIMETRES WITH LOWERABLE COMFORT SEAL

Kömmerling PremiPlan Plus


The premium threshold system for optimum barrier freeness with excellent walking comfort, with an installation position at ground level of zero millimetres. A floor seal that can be lowered in parallel is a central component of a multistage and consistent sealing concept that achieves maximum values by means of specially developed structured parts. The modular structure of the system enables efficient production and installation.

- > Kömmerling PremiPlan Plus is a threshold system for optimum barrier freeness with an installation position at ground level of zero millimetres
- > The floor seal that can be lowered in parallel is a central component of the multistage and consistent sealing concept
- > No slide seal on the threshold
- > Suitable for the Kömmerling 76 Unity window and residential door systems, double seal and centre seal and Kömmerling 88 double seal and centre seal
- > For centre-hung glazed doors, side entrance and doors
- > Tightness against driving rain class 9A
- > Secure building connector with stainless steel connection angles and connecting plates



Balcony door
with system
Kömmerling 76
double seal

TESTED QUALITY FROM KÖMMERLING

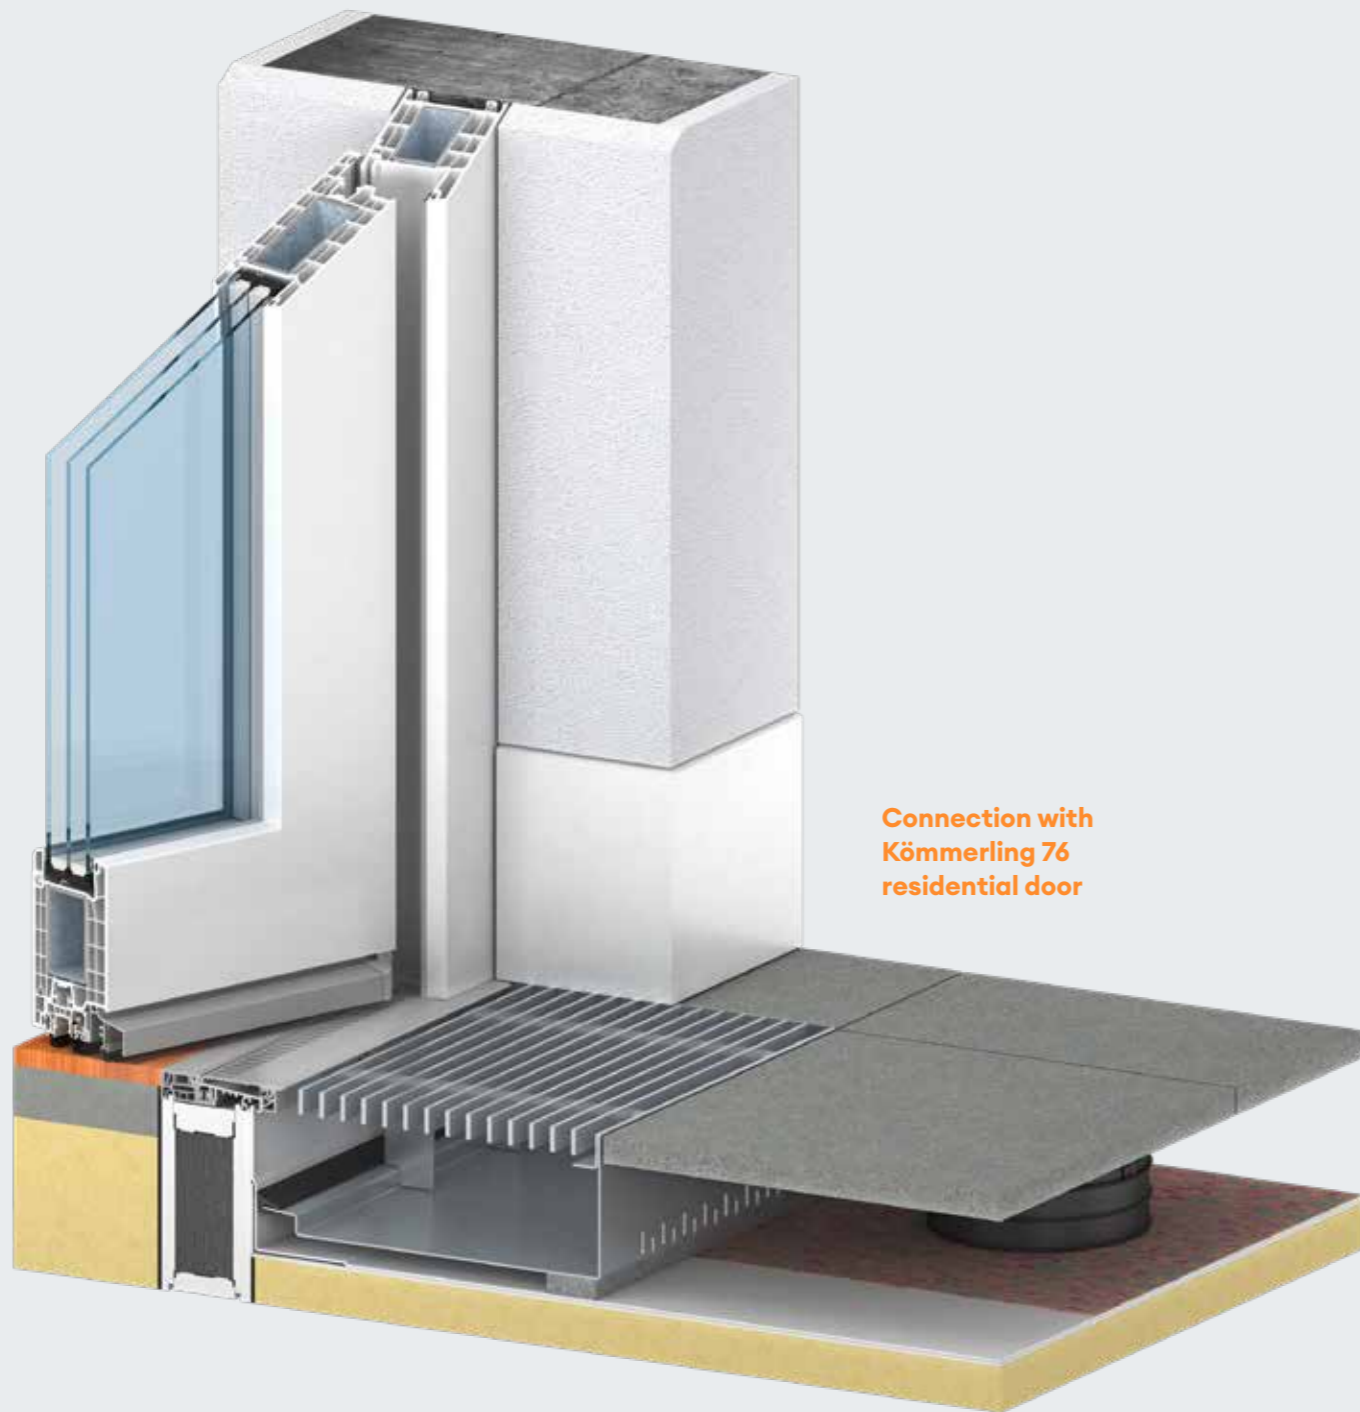


Connection with
Kömmerring 76
residential door

Foil sealing

EVALON-coated connection angles and connecting plates specially designed for the systems allow simple connection of the flexible waterproofing sheets and proper installation of the zero-threshold channel.

Liquid sealant

When using a liquid sealant, the material compatibility must be coordinated with the supplier in advance.

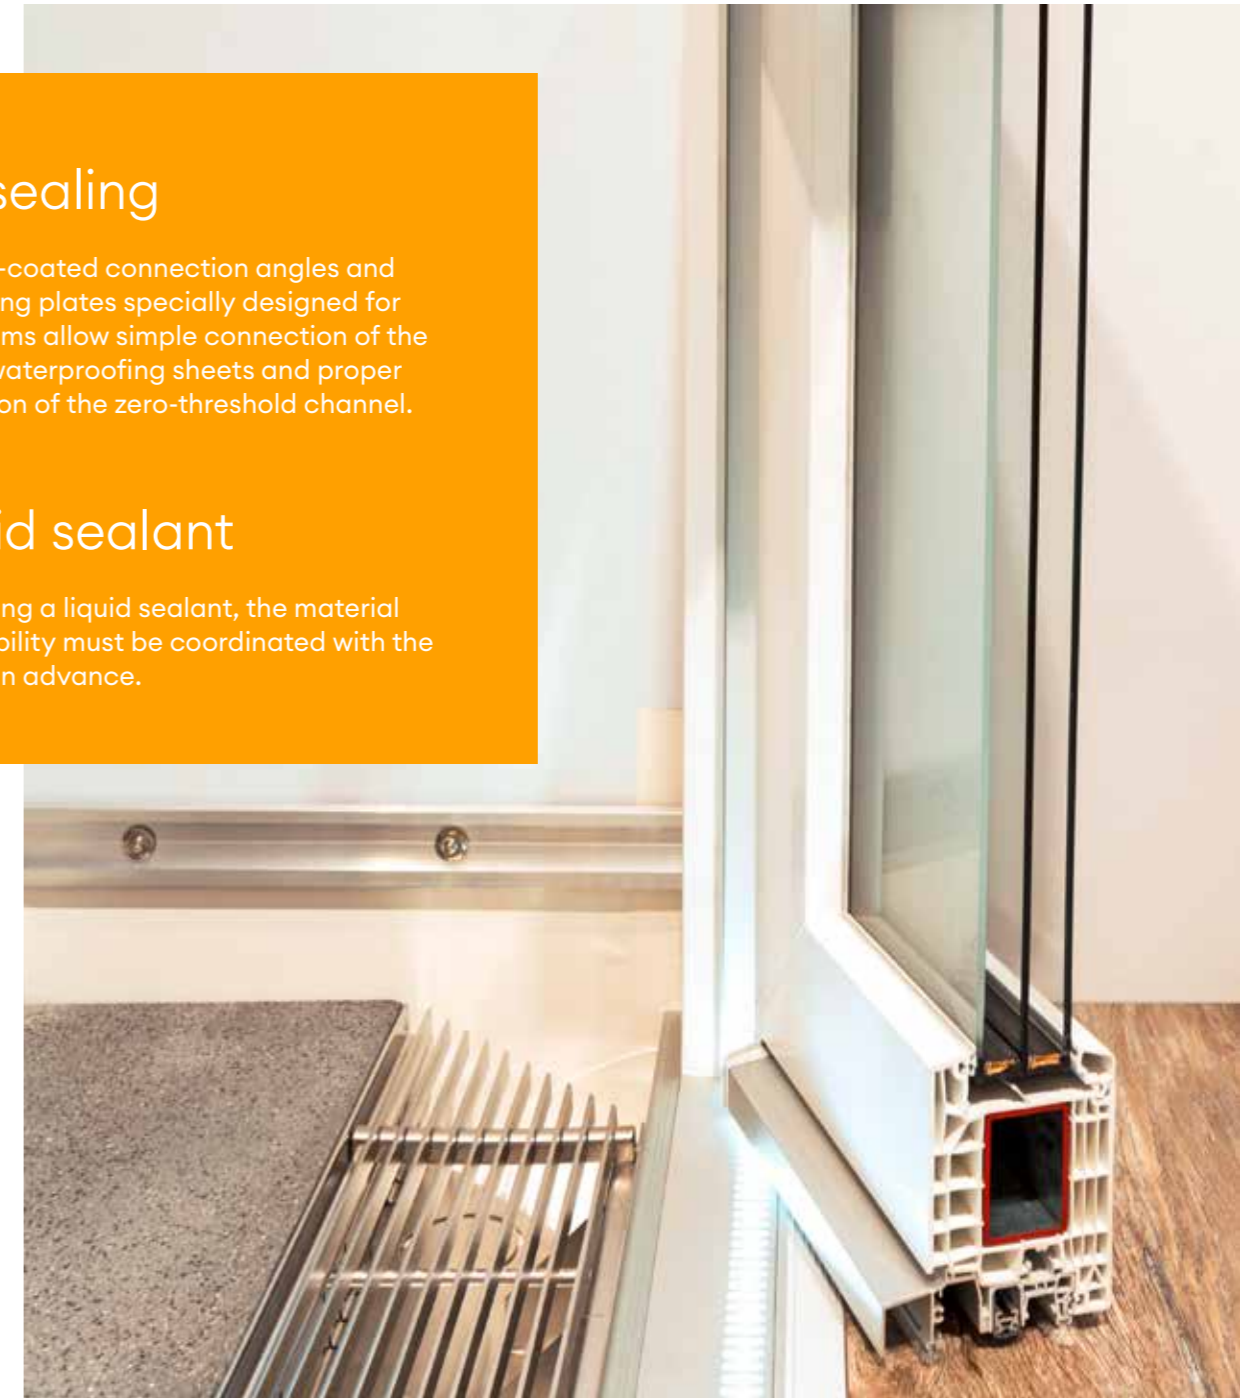

	Kömmerring 76 double seal		Kömmerring 76 centre seal		Kömmerring 88 centre seal	
Centre-hung glazed door, single-leaf, inward opening	ift	🌀	ift	🌀	ift	🌀
Centre-hung glazed door, two-part, inward opening	ift	🔊	ift	🔊	ift	🔊
Side entrance door, single-leaf, inward opening	ift	🌀	ift	🌀	ift	🌀
Side entrance door, two-part, inward opening	ift	🔊	ift	🔊	ift	🔊
Residential door, single-leaf, inward opening	ift	🌀	ift	🌀	ift	🌀

#KömmerlingForTomorrow

profine GmbH
Kömmerling

Zweibrücker Straße 200
66954 Pirmasens
Tel. +49 (0) 6331 560
E-mail: info@koemmerling.com

www.koemmerling.com

